




HTA

A VERSATILE DESIGN

HTA is a suspended luminaire with a robust appearance and can be supplied with various lens configurations. So there is always enough light when and where it is needed. The top cover is supplied as standard in black (RAL 9005) and can be supplied in other RAL colours as an option. The HTA (Hanging Tulip Luminaire) belongs to the GAM and MAK family. HTA combines a striking look with the advantages of modern LED light technology.

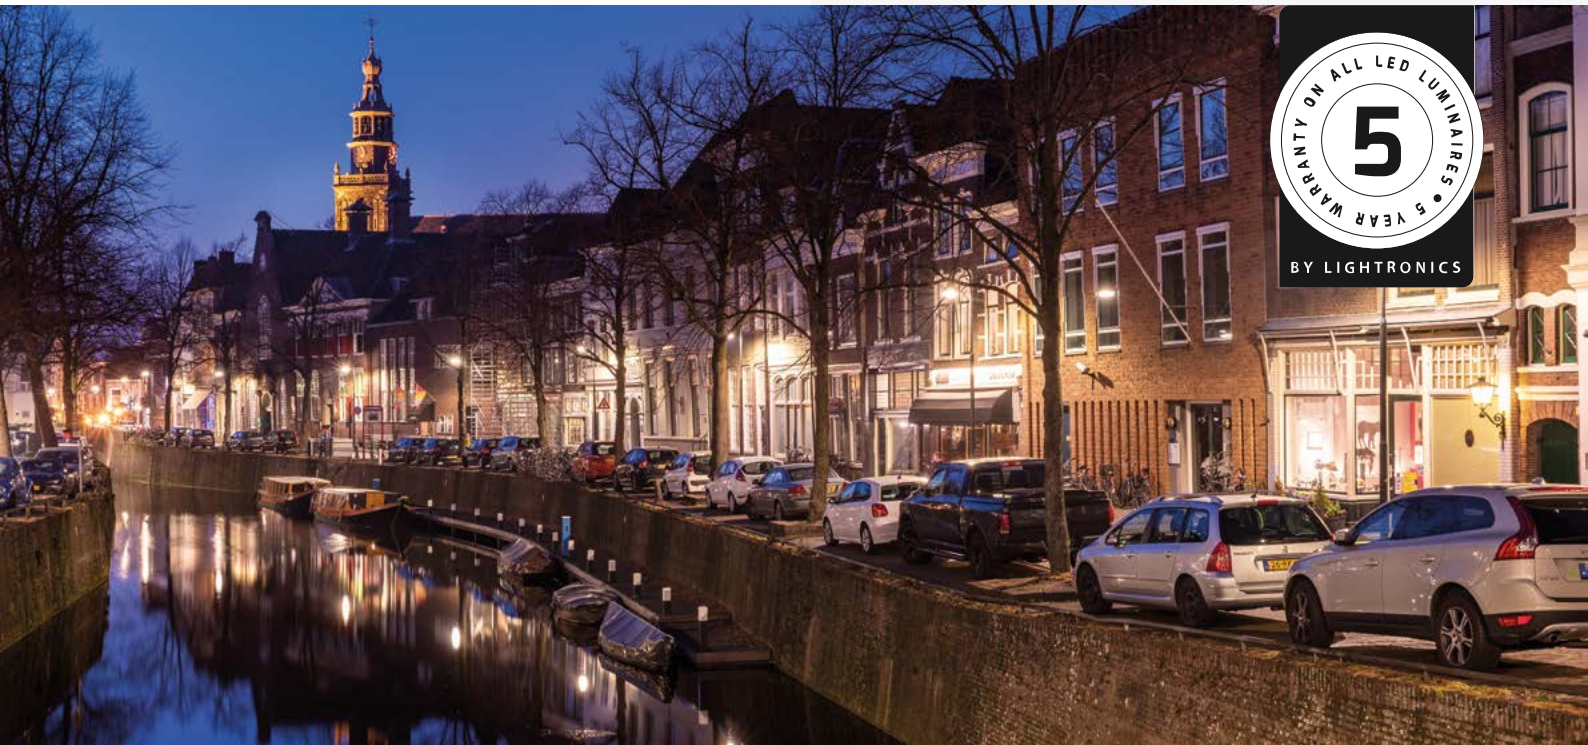

Application areas



Characteristics



IP 65

IK 10

CE

PRODUCT SPECIFICATIONS

- Aluminium coated top cover, black (RAL9005)
- Light cover: UV stabilized clear polycarbonate, with or without leather structure
- Extension 3/4" external
- Mass: ± 10 kg (depends on model)
- Wind surface: ± 0.1 m²
- Safety class: I
- Assembly-, installation- and maintenancefriendly
- Voltage: 230/240 V, 50 Hz
- CRI: > 70
- Colour temperature neutral white (4000K), warm white (3000K) or extra warm white (2700K)
- Expected lifespan 100.000 hours at T environment = 25°C (L96/F10)
- Different lens configurations

OPTIONS


- Other RAL colour
- Connection: 1/2" external
- Dali
- Constant Lumen Output (CLO)
- Safety class: II

SMART CITY READY (optional)

Zhaga book 18 connector and screw cap (water-proof, IP66)

DIMENSIONS HTA

in mm

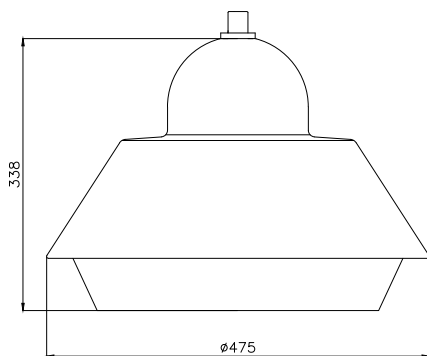

Lightronics supplies its luminaires as standard as Easy Light, with five standard dimming schedules (1A, 2A, 3A, 4A or 5A) that can switch capacity and brightness based on pre-set times.

HTA | LED²WELL CORE OUR STANDARD LIGHTING SOLUTION

		2700K		3000K		4000K	
Number of LEDs	Lumen	LED-power (W)	System power (W)	LED-power (W)	System power (W)	LED-power (W)	System power (W)
16	800	5,9	8,1	5,7	8,0	5,5	7,7
	1050	7,7	10,0	6,8	9,0	6,3	8,6
	1200	8,4	10,7	7,5	9,8	7,2	9,5
	1350	9,3	11,7	8,1	10,5	7,9	10,2
	1500	10,2	12,6	8,8	11,2	8,5	10,9
	1600	10,6	13,1	9,3	11,7	9,0	11,4
	1800	11,7	14,2	10,4	12,8	10,0	12,4
	2000	13,7	16,3	11,2	13,7	10,6	13,1
	2150	14,8	17,5	12,4	14,9	11,5	13,9
	2300	16,0	18,7	13,5	16,1	12,6	15,1
	2500	18,0	20,9	14,8	17,5	14,2	16,8
	2750	19,8	22,8	16,6	19,4	15,7	18,5
	3000	21,9	25,0	18,5	21,4	17,3	20,1
	3240	24	27,2	20,3	23,3	18,9	21,8
	3500	26,1	29,5	22,1	25,2	20,1	23,8
32	3240	20,4	23,8	18,7	22,0	17,7	21,1
	3500	22,1	25,7	19,9	23,4	19,5	22,9
	3780	23,9	27,4	20,8	24,2	20,4	23,8
	4000	25,3	28,7	22,1	25,6	20,8	24,2
	4320	27,6	31,1	24,3	27,8	22,9	26,5
	4860	31,8	35,7	28,3	32,1	26,6	30,3