

PKA

— MODERN AND DECORATIVE

The PKA has a clear light cover and a lamella refractor as standard, to ensure good and pleasant light distribution. So that there is always enough light when and where it is needed. The design of the PKA provides accents in a public space and is energy-efficient. The application of dimming schedules can lead to additional energy savings.



Application areas



RESIDENTIAL
AREAS



CITY CENTERS



SHOPPING
MALLS



PARKS

Characteristics



IP 66

IK 10

CE

PRODUCT SPECIFICATIONS


- UV-stabilised polycarbonate top cover, black (RAL 9005) and aluminium coated lid, black (RAL 9005)
- Light cover: UV-stabilised, clear
- Lamella refractor: Polycarbonate, frosted
- Pole-mounted size 60 mm
- Mass: ± 8 kg (depends on model)
- Wind surface: ± 0.15 m²
- Safety class: I
- Assembly-, installation- and maintenance-friendly
- Voltage: 230/240 V, 50 Hz
- CRI: > 80
- Colour temperature neutral white (4000K) or warm white (3000K)
- Expected lifespan 100.000 hours at T environment = 25°C (L96/F10)

OPTIONS

- Other RAL colour
- Top cover inside white (RAL 9010)
- Executed without top cover
- Pole mounted size 76 mm
- Safety class: II
- Constant Lumen Output (CLO)

DIMENSIONS PKA


in mm

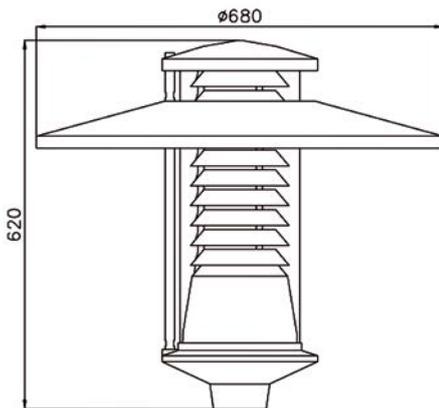

Lightronics supplies its luminaires as standard as Easy Light, with five standard dimming schedules (1A, 2A, 3A, 4A or 5A) that can switch capacity and brightness based on pre-set times.

MPLED				
Lumen	3000K		4000K	
	LED-power (W)	System power (W)	LED-power (W)	System power (W)
2670	15	17	14	16
3330	19	21	17	19
4660	26	28	24	26
5130	29	31	26	28
5670	32	34	29	31

LED - CIRCULAR

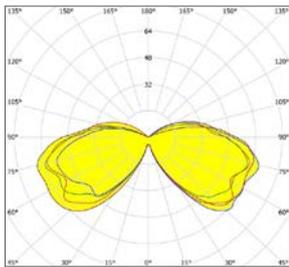

LED - ASYMMETRICAL

