


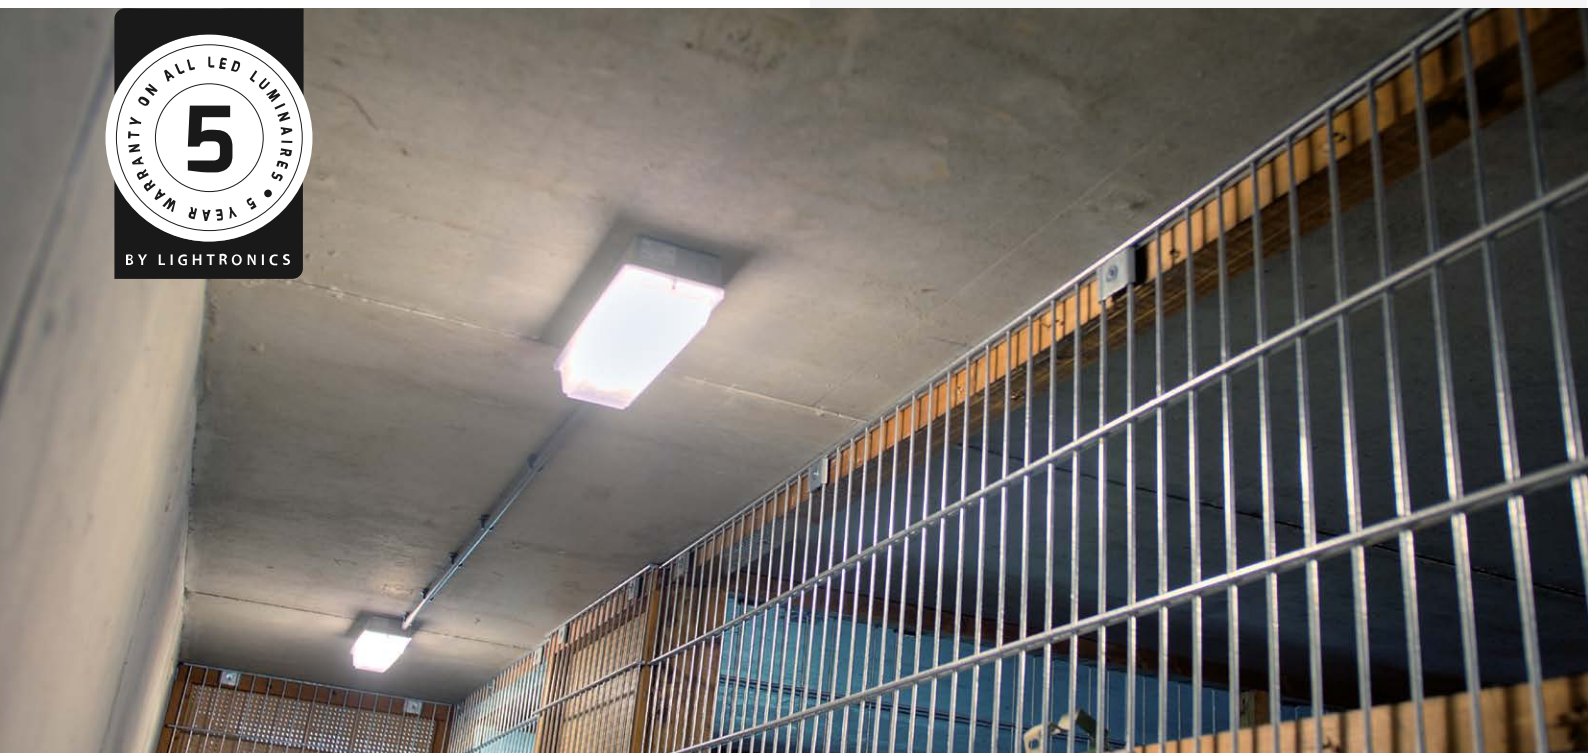

PVR

HOGRO
BY LIGHTRONICS

IMPACT-RESISTANT AND VANDAL-PROOF

The impact-resistant (>4 x IK10) PVR is a robust, vandal-proof surface-mount luminaire. The luminaire is easy to mount, install and maintain. The luminaire can be used as continuous and emergency lighting in storage rooms, external access galleries, technical rooms and stairwells. The PVR is dust-tight and waterproof (IP65).



Applications



GALLERIES



STAIR WELLS



STORAGES

Features



IP 65

≥4 x IK 10



OPTIONS



PRODUCT SPECIFICATIONS


- Housing made of impactproof, flame-retardant, UV-stabilised polycarbonate
- Standard colour RAL 7032
- Light cover made of polycarbonate, clear or opal
- Dimensions (l x w x h): 355mm x 102mm x 76mm
- Cable entry at the back
- Safety class I
- Voltage: 230/240 V, 50 Hz
- Assembly-, installation- and maintenance friendly
- CRI > 80
- Colour temperature warm white (3000K) or neutral white (4000K)
- Expected lifespan 100.000 hours at T-ambient = 25°C (L80/F10)

OPTIONS

- Seperate cover clear or opal
- Protective cap
- Square mounting plate for emergency exit-indication
- Pictogram for emergency exit-indication
- Emergency/continuous lighting, incl. ATF (1 hour)
- 24 Volt DC based on 1 LEDstrip
- Cable entry at the side
- Safety class II

DIMENSIONS PVR

in mm

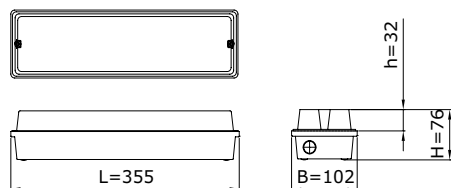

PVR EASY LIGHT		
Lumen	LED power (W)	System power (W)
440	2,3	3,4
560	3,0	4,1
840	4,5	5,7



Luminaires in the Easy Light version can be programmed in various luminous fluxes. They can also be optionally equipped with a twilight switch so that the fixture automatically reacts to light and dark. The sensitivity of the sensor can be adjusted by means of dipswitches.