


STREET AND OUTDOOR LIGHTING - POLE TOP LUMINAIRE

One standard for all applications!



JUNO

Application areas



Business parks



Car parks



Industrial zones



Recreational areas

Top cover: aluminium, coated, RAL 7016

Light cover: UV-stabilised polycarbonate, clear


Light source: LED

IP 66

IK 10




Dimensions in mm:

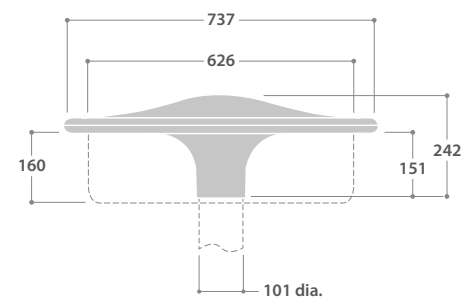


Reducers:

101-76 mm reducer, to suit 76 mm column

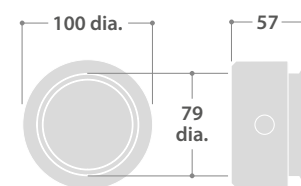

101-89 mm reducer, to suit 89 mm column

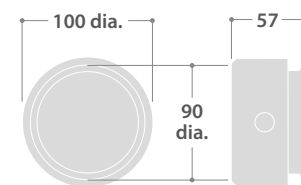

Technical specifications



Product specifications

- colour temperature neutral white (4000K)
- light cover: UV-stabilised polycarbonate, clear
- weight: approx. 17 kg
- assembly-, installation-and maintenance-friendly
- pole-mount size: 101 mm
- CRI: > 70
- voltage: 230/240 V, 50 Hz
- safety class: I
- wind surface: approx. $\pm 0.06 \text{ m}^2$
- standard colour: RAL 7016
- assembled cable: 12 meter

Options

- light sensitive switch
- other RAL colour
- different assembled cable and lengths
- reducers for 76 and 89 mm mast diameter

POLETOP LUMINAIRE - 4000K



	Lumen LEDs	Lumen luminaire	LED power (W)	System power (W)
ASYMM	13905	12515	99	108
	18089	16280	132	144
	21944	19750	216	166
SYMM	26988	24020	177	197
	28408	31920	246	265
	35546	39940	326	350



Asymmetrical



Symmetrical



Visit our website for the most up to date information

www.lightronics.eu

