



PVP

HOGRO
BY LIGHTRONICS

MULTIPURPOSE

The PVP is a slimline surface-mount luminaire. Thanks to its compact dimensions and multi functionality, the PVP luminaire is an ideal solution for almost any conceivable location. The PVP is easy to mount, install and maintain and is vandal-proof (>2x IK10). This impact-resistant wall and ceiling lighting unit is suitable for storage rooms, external access galleries, technical rooms and stairwells.



Applications



GALLERIES




STAIR WELLS



STORAGES

Features



OPTIONS



PRODUCT SPECIFICATIONS


- Housing made of impactproof, flame-retardant, UV-stabilised polycarbonate
- Standard colour RAL 7032
- Light cover made of polycarbonate, frosted or opal
- Dimensions (l x w x h): 361mm x 74mm x 98mm
- Cable entry at the back and side
- Safety class I
- Voltage: 230/240 V, 50 Hz
- Assembly-, installation- and maintenance friendly
- CRI > 80
- Colour temperature warm white (3000K) or neutral white (4000K)
- Expected lifespan 100.000 hours at T-ambient = 25°C (L80/F10)

OPTIONS

- Seperate cover frosted order opal
- 24 Volt DC based on 1 LEDstrip
- Safety class II

DIMENSIONS PVP

in mm

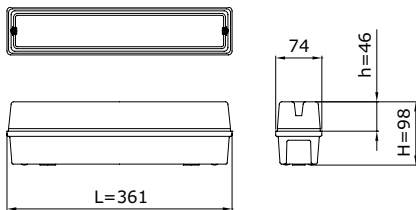

PVP EASY LIGHT		
Lumen	LED power (W)	System power (W)
440	2,3	3,4
560	3,0	4,1
840	4,5	5,7



Luminaires in the Easy Light version can be programmed in various luminous fluxes. They can also be optionally equipped with a twilight switch so that the fixture automatically reacts to light and dark. The sensitivity of the sensor can be adjusted by means of dipswitches.