



SATEGO

LED LUMINAIRE: SLEEKLY DESIGNED AND IMPACT-RESISTANT

The sleekly designed SATEGO luminaire is impact-resistant and vandal-proof (7x IK10). So this luminaire is suitable for tram/bus/metro and train stations, underpasses, tunnels, prisons and parking garages. As the SATEGO can be supplied with anti-graffiti coating, the luminaire can be deployed across the board. The luminaire is also suitable for use as emergency lighting.



Application areas



Features



IP 54

7 x IK 10

CE



PRODUCT SPECIFICATIONS


- Double Coated aluminium housing, light aluminium (RAL 9006)
- End caps in double coated stainless steel, light aluminium (RAL 9006)
- Light cover 6 mm polycarbonate, clear with structure on the inside
- Standard closure with triangular screw
- Assembly, installation and maintenance friendly
- Voltage 230/240 V, 50 HZ
- CRI: >80
- Colour temperature neutral white (4000K)
- Expected lifespan 100.000 hours at
T environment = 25°C (L80/F10)

OPTIONS


- Colour temperature warm white (3000K)
- 1-10V / Dali
- Control phase
- Constant Lumen Output (CLO)
- Constant Current
- Safety class II
- Other RAL colour
- Anti-graffiti coating
- Emergency lighting (from L 1350 mm)
- Key for security screw HSS
- Key for JVA 3-pin screw

DIMENSIONS SATEGO

in mm

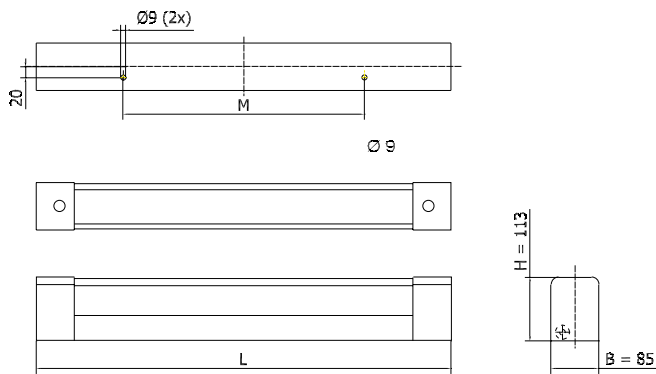

LED

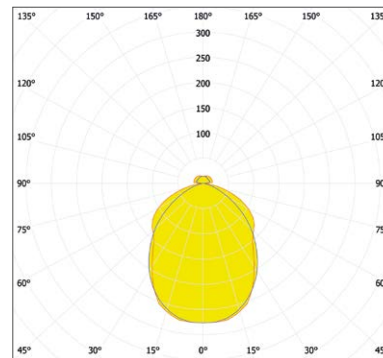

SATEGO LUMEN LED			
LUMEN LED	HOUSING	SIZE L (MM)	SIZE M (MM)
1100 / 1300 / 1600 / 1800 / 2000 / 2200 / 2500 / 2800 / 3100 / 3400 / 3600	2	740	430
3600 / 3900 / 4400 / 5000 / 6000 / 6500 / 7000 / 7500 / 8000	4	1350	800



Lightronics supplies its fixtures standard as Easy Light with a fixed lumen output.